

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093332 A1

(51) International Patent Classification⁷: **F24F 13/06**,
13/10, 13/28

(21) International Application Number:
PCT/SE2005/000345

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0400796-9 26 March 2004 (26.03.2004) SE

(71) Applicant and

(72) Inventor: **ANDERSSON, Fredrik** [SE/SE]; Infanteri-
gatan 3, S-171 59 Solna (SE).

(74) Agents: **SUNDSTRÖM, Per** et al.; Stenhagen Patentbyrå
AB, P.O. Box 4630, S-116 91 Stockholm (SE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: A SUPPLY AIR TERMINAL ASSEMBLY

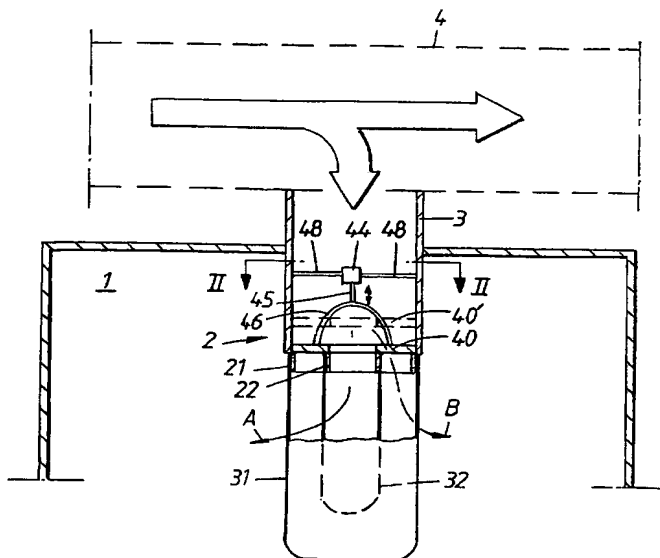

(57) Abstract: Supply air terminal assembly for the supply of supply air to a room, the supply air terminal assembly comprising two throttling units (21, 31, 22, 32), which are supplied with supply air from a supply air pipe (3), each throttling unit being formed in order to give the passing supply air flow a preselected pressure drop under weak noise generation, one of, the first, throttling unit (21, 22) having a preconnected shut off valve (40, 44, 45) which normally is closed, and which is arranged to be reset into an open position (40') for temporary enhancement of the supply air flow through the supply air terminal assembly. In the closed state, the valve (40, 44, 45) is arranged to connect the two throttling units in series in the flow direction of the supply air, the first throttling unit (21, 31) being located downstream the second throttling unit (22, 32), and in the open state connects the two throttling units in parallel.